

**Work Order ID 147010**

Wednesday, May 25, 2016 1:12:46 PM

**\*147010\***

Page 1

Item ID: D139-1012-041

Accept

**\*N900040100\***Setup Start **\*NS1\***

Revision ID:

Stop **\*NS2\***

Item Name: AW139 Cargo Net Assembly

Start Date: 5/25/2016 Start Qty: 1.00

**\*1\***

Cust Item ID:

Required Date: 6/30/2016 Req'd Qty: 1.00

**\*1\***

Customer:

Reference:

Approvals: Process Plan: DAS 13 Date: MAY 25 2016 Tooling: \_\_\_\_\_ Date: \_\_\_\_\_  
QC: 9-89 Date: \_\_\_\_\_ SPC (Y/N): \_\_\_\_\_ Date: \_\_\_\_\_

Run Start **\*NR1\***Stop **\*NR2\***

| Sequence ID/<br>Work Center ID | Operation<br>Description | Set Up/<br>Run Hours | Tool ID | Tool # | Plan<br>Code | Accept<br>Qty | Reject<br>Qty | Reject<br>Number | Insp.<br>Stamp |
|--------------------------------|--------------------------|----------------------|---------|--------|--------------|---------------|---------------|------------------|----------------|
|--------------------------------|--------------------------|----------------------|---------|--------|--------------|---------------|---------------|------------------|----------------|

| Draw Nbr      | Revision Nbr |
|---------------|--------------|
| D139-1012-041 | B            |

100

0.00

**\*100\***

Purchasing

Purchasing

Memo

0.00

Issue P/O: 32265  
Manufacture as per Dwg  
Possible supplier: TULMAR

1 MAY 25 2016**DAS**  
**13**  
**9-89**

10 PARTS INCLUDED IN D139-1012-041:  
QTY 4 D5256-041 ✓  
QTY 2 D5256-3 ✓  
QTY 6 D5289-041 ✓  
QTY 1 D5289-043 ✓  
QTY 1 D5289-045 ✓  
QTY 1 D5289-047 ✓  
QTY 1 D5366-041

Material release note is required.

# Picklist Print

Wednesday, May 25, 2016 1:12:45 PM

Page 1

Work Order ID: 147010

\*147010\*

Parent Item: D139-1012-041

\*D139-1012-041\*

Parent Item Name: AW139 Cargo Net Assembly

Start Date: 5/25/2016

Required Date: 6/30/2016

Start Qty: 1.00

Required Qty: 1.00

Comments: IPP REV:A 16.03.29 NEW ISSUE DD VERF:JLM

| Component Item ID/<br>Item Name | Replacement<br>Item ID | Mfg/<br>Purch | Bin<br>Item | Primary<br>Location | Last<br>Location | Route<br>Seq ID | Unit of<br>Measure | Qty on<br>Hand | Qty per Kit | Total<br>Qty | Qty<br>Issued | Date<br>Issued | Status |
|---------------------------------|------------------------|---------------|-------------|---------------------|------------------|-----------------|--------------------|----------------|-------------|--------------|---------------|----------------|--------|
| D139-1012-041P                  |                        | Purchased     | No          |                     |                  |                 | Each               | 0.0000         |             | 1            |               |                |        |
| *D139-1012-041P*                |                        |               |             |                     |                  |                 |                    |                | **          |              |               |                |        |
| AW139 Cargo Net Assembly        |                        |               |             |                     |                  |                 |                    |                |             |              |               |                |        |
| D5295-1                         |                        | Manufactured  | No          |                     |                  |                 | Each               | 32.0000        |             | 4            |               |                |        |
| *D5295-1*                       |                        |               |             |                     |                  |                 |                    |                | **          |              |               |                |        |
| Ring                            |                        |               |             |                     |                  |                 |                    |                |             |              |               |                |        |
|                                 |                        |               |             |                     | <u>Location</u>  | <u>Loc Qty</u>  | <u>Loc Code</u>    |                |             |              |               |                |        |
|                                 |                        |               |             |                     | ST161            | 32              |                    |                |             |              |               |                |        |
|                                 |                        |               |             |                     | 145150           | 32              |                    |                |             |              |               |                |        |
| D5296-3                         |                        | Manufactured  | No          |                     |                  |                 | Each               | 0.0000         |             | 4            |               |                |        |
| *D5296-3*                       |                        |               |             |                     |                  |                 |                    |                | **          |              |               |                |        |
| 2" O/C Buckle                   |                        |               |             |                     |                  |                 |                    |                |             |              |               |                |        |
| D5298-1                         |                        | Manufactured  | No          |                     |                  |                 | Each               | 0.0000         |             | 8            |               |                |        |
| *D5298-1*                       |                        |               |             |                     |                  |                 |                    |                | **          |              |               |                |        |
| 2" Twisted Snap Hook            |                        |               |             |                     |                  |                 |                    |                |             |              |               |                |        |
| D5294-1                         |                        | Manufactured  | No          |                     |                  |                 | Each               | 0.0000         |             | 6            |               |                |        |
| *D5294-1*                       |                        |               |             |                     |                  |                 |                    |                | **          |              |               |                |        |
| 1" Snap Hook                    |                        |               |             |                     |                  |                 |                    |                |             |              |               |                |        |
| D5296-1                         |                        | Manufactured  | No          |                     |                  |                 | Each               | 0.0000         |             | 6            |               |                |        |
| *D5296-1*                       |                        |               |             |                     |                  |                 |                    |                | **          |              |               |                |        |
| 1" O/C Buckle                   |                        |               |             |                     |                  |                 |                    |                |             |              |               |                |        |
| D5297-1                         |                        | Manufactured  | No          |                     |                  |                 | Each               | 0.0000         |             | 6            |               |                |        |
| *D5297-1*                       |                        |               |             |                     |                  |                 |                    |                | **          |              |               |                |        |
| Buckle, Male                    |                        |               |             |                     |                  |                 |                    |                |             |              |               |                |        |
| D5297-3                         |                        | Manufactured  | No          |                     |                  |                 | Each               | 0.0000         |             | 6            |               |                |        |
| *D5297-3*                       |                        |               |             |                     |                  |                 |                    |                | **          |              |               |                |        |
| Buckle, Female                  |                        |               |             |                     |                  |                 |                    |                |             |              |               |                |        |

1X 5016-7-6

DAS  
13  
9-89

MAY 26 2016

DAS  
13  
9-89

MAY 26 2016

DAS  
13  
9-89

MAY 26 2016

DAS  
13  
9-89

MAY 26 2016

DAS  
13  
9-89

MAY 26 2016

DAS  
13  
9-89

AUG 02 2016

DAS  
13  
9-89

AUG 02 2016

DAS  
13  
9-89

MAY 26 2016

D5297-041 X6  
B145182

# Picklist Print

Wednesday, May 25, 2016 1:12:45 PM

Page 2

Work Order ID: 147010

**\*147010\***

Parent Item: D139-1012-041

**\*D139-1012-041\***

Parent Item Name: AW139 Cargo Net Assembly

Start Date: 5/25/2016

Required Date: 6/30/2016

Start Qty: 1.00

Required Qty: 1.00

D5321-5

Manufactured No

Each

40.0000

**\*D5321-5\***

\*\*

8/

DAS  
13  
9-89

**MAY 26 2015**

Ring

Location

Loc Qty

Loc Code

ST162

40

145159

40



Dart Aerospace Ltd.  
1270 Aberdeen Street  
Hawkesbury, ON K6A 1K7  
Tel: 613 632 9577  
Fax: 613 632 1053

# PURCHASE ORDER

Purchase Order ID **PO32265**

Purchase Order Date 5/5/2016 10:30:27 AM

PO Print Date 6/21/2016

Page Number 2 of 8

**Order From :**

VC-TUL001

**Ship To :** DART AEROSPACE LTD

TULMAR SAFETY SYSTEMS  
1123 CAMERON ST  
HAWKESBURY, ON K6A 2B8  
CA

1270 ABERDEEN  
HAWKESBURY, ON K6A 1K7  
CANADA

**Contact Name**

**Vendor Phone** 613 632 1282

**Ship To Contact**

**Ship To Phone**

**Ship Via:** VENDOR'S TRUCK

**Ship Acct:**

**Buyer**

Chantal Lavoie

**Customer POID**

**Customer Tax #**

10127-2607

**Terms**

Net 30

**Currency**

CAD

**FOB**

FCA - (Free Carrier)

2 D139-1012-041P AW139 Cargo Net Assembly

6/30/2016 FN

1.00

\$1,710.00

\$1,710.00

Yes

Each

6/30/2016

AS PER DWG D139-1012-041 REV. B  
B147010

**PARTS INCLUDED IN D139-1012-041:**

4 X D5256-041

2 X D5256-3

6 X D5289-041

1 X D5289-043

1 X D5289-045

1 X D5289-047

1 X D5366-041

\$150.00 added per net for cost of new buckles

SP16-7-6.

**Line Total:**

**\$1,710.00**

**PO Instructions:** NOTE: SUPPLIER TO PURCHASE RAW MATERIALS AS PER DRWG  
Supplier may purchase raw materials as described in the drawing. Supplier is not required to provide FAR test reports or certification. FR clause removed  
"Product made to the drawing, except for 1" and 2" Red webbings not certified to FAR.29.853a3"

**Note:**

6/21/2016

# PACKING SLIP

## TULMAR

Tulmar Safety Systems Inc.  
1123 Cameron Street  
Hawkesbury, ON K6A 2B8  
Tel: 613-632-1282  
Fax: 613-632-2030  
GST R132478223  
MID : XOTULSAF1123HAW  
email: info@tulmar.com

Packing Slip No Page  
**57733** 1

Ship Date  
6/29/2016

Bill To:

**Dart Aerospace**  
1270 Aberdeen Street  
Hawkesbury, ON K6A 1K7  
Canada

Ship To:

**Dart Aerospace**  
1270 Aberdeen Street  
Tel: 613-632-9577  
Hawkesbury, ON K6A 1K7  
Canada

|                                       |                                     |                                         |                             |                                           |
|---------------------------------------|-------------------------------------|-----------------------------------------|-----------------------------|-------------------------------------------|
| <b>Order number</b><br>33869          | <b>Sales order date</b><br>5/5/2016 | <b>Account number</b><br>CDART100       | <b>Loc</b><br>H             | <b>Account manager</b><br>Francine Bigras |
| <b>PO number</b><br>PO32265 - REVISED | <b>Ship via</b><br>Pick-Up          | <b>Shipping Terms</b><br>FOB HAWKESBURY |                             |                                           |
| <b>Item No.</b>                       | <b>Quantity ordered</b>             | <b>UOM</b>                              | <b>Qty Shipped/Returned</b> | <b>Quantity on back order</b>             |

**Description**

Line 24 = QA Clauses  
A004, A005, A007, A016, A026, A040,  
A041, A043 (TSS only 5yrs)  
\*Note: Supplier to purchase raw material  
as per Dwg - Supplier is not required to  
provide FAR test reports or  
certification. FR Clause removed.  
PO Rev 6/1/16 added note: "Product made  
to the drawing, except for 1" and 2" Red  
webbings not certified to FAR.29.853a3".  
\*\*\*\*\*

|           |      |    |      |
|-----------|------|----|------|
| 87249-001 | 5.00 | EA | 5.00 |
|-----------|------|----|------|

Cargo Net, AW 139  
Drawing No: D139-1012-041  
DWG Rev: B  
Lines 1, 2, 3, 4, 5, 23  
SF 40169 --> 40170-76  
Certification includes to  
Drawing D5289+MU Rev. B+1 Sheet.  
**Lot no.:** BATCH0000000002 5.00

*1x sp 16-7-6.*

### Certificate of Conformance

☒ See Certification Enclosed

I hereby certify that the items listed hereon have been inspected, and / or tested (as applicable), conform to all specifications and requirements detailed in the contract or purchase order. Objective evidence to support this statement is on file, and can be made available upon request.  
If any questions or concerns, please contact QA Manager @ 613-632-1282 ext. 245.

Authorized Inspector

*Francine Liberté*

Date: JUN 30 2016

May 20, 2016

Tulmar Safety Systems  
1123 Cameron Street  
Hawkesbury, ON K6A 2B8  
CANADA



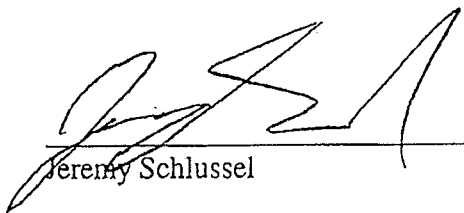
Problem Shared.  
Problem Solved.™

168 Doughty Blvd.  
Inwood, NY 11095  
USA

### Certificate of Conformance

|             |          |
|-------------|----------|
| Part Number | 1753-001 |
| Style       | TP21J    |
| Color       | Black    |
| PO          | 30129-00 |
| Yardage     | 130 yds. |
| Lot Number  | F23872   |

This is to certify that the material listed above was tested and passed FAR25.853.



Jeremy Schlussel

Quality Control Specialist

JS:db

CLC's used to mfg.

Cargo Net, AW139

D139-1012-041 Rev. B.

1753 -col  
B #1

MAY 31 2016



Louise LaLiberté June 29/16  
(248:5)





Bally Ribbon Mills  
23 North 7th St. Bally PA 19503  
p 610.845.2211 f 610.845.8013

06/02/16

## CERTIFICATE

Number: 237437-7596

Qualified Lab - List No. 1935

|                    |                                                      |              |                 |
|--------------------|------------------------------------------------------|--------------|-----------------|
| Customer           | TULMAR SAFETY SYSTEMS                                | Memo No.     | 431476          |
| Purchase Order No. | 30196-00                                             | Shipment     |                 |
| Specifications     | MIL-W-4098K TYPE VIIIB CL.1                          | Shipped Via  | FEDX PRIORITY 1 |
| Contract No.       | LOT #9C8905 DOM:04/16<br>UV, MOULD, FUNGUS RESISTANT | Quantity     | 108 YD          |
| BALLY RIBBON MILLS | 938102000BKFT                                        | Lot Quantity | 1247 YDS        |
| Pattern No.        | 9381-2" BLACK FLAME RESIST. TREATED NYL.             |              |                 |

### CERTIFICATE OF CONFORMANCE

I CERTIFY THAT THIS PATTERN CONFORMS WITH THE PHYSICAL, CHEMICAL AND VISUAL QUALITY REQUIREMENTS OF THE MILITARY SPECIFICATIONS LISTED ABOVE AND THE FAR 25.853(A) APPENDIX F, PART 1, SUBSECTION (A)(1)(II) FLAMMABILITY REQUIREMENTS PER FEDERAL STD. 191, METHOD 5903. NOTE: THIS CERT IS FOR BRM TESTING ONLY AND DOES NOT INDICATE FAA ACCEPTANCE.

Jerome Richards, Quality Assurance Manager



2227-002

B#1

JUN 07 2016





# LAB REPORT

PAGE: 1

Number: 237437-5117

Bally Ribbon Mills  
23 North 7th St. Bally PA 19503  
p 610.845.2211 f 610.845.8013

06/02/16

Qualified Lab - List No. 1935

Customer TULMAR SAFETY SYSTEMS

Purchase Order No. 30196-00

Shipped Via FEDX PRIORITY 1

Specifications MIL-W-4088K TYPE VIIIB CL.1  
Contract No. UV, MOULD, FUNGUS RESISTANT  
DOM: 04/16 LOT: 9C9905

Memo No. 431476  
Shipped Qty 108 YD

BALLY RIBBON MILLS 938102000BKFT Lot Qty 1247  
Pattern No. 9381-2" BLACK FLAME RESIST. TREATED NYL.WEBBING

.....TESTS..... \*.....TEST RESULTS.....\* AVERAGE \*...-REQUIREMENT-...\* METHOD

FAR 25.853 (a) APPENDIX F  
PART 1 SUBSECTION (a) (1) (II),  
CHARLENGTH: 1 1/4" 1 3/8" 1 5/16" : 8" MAX  
BURN TIME : 5.2S 8.2S 5.6S : 15 SEC MAX  
FLAMEDRIPPS: 0 0 0 : 5 SEC MAX  
S/E : Y Y Y : S/E  
FAR 29.853, (a) (1) (V)  
BURN RATE 0 0 0 4"/MIN MAX

|                         |       |       |       |       |       |        |                    |      |
|-------------------------|-------|-------|-------|-------|-------|--------|--------------------|------|
| WIDTH                   | 2.031 | 2     | 1.968 | 2.015 | 1.984 | 1.9996 | 2" +/- 1/16"       | 5020 |
|                         | 2     | 2     | 1.968 | 1.984 | 2     | 1.9904 |                    |      |
|                         | 2.031 | 2.015 | 2     | 2     | 2.015 | 2.0122 |                    |      |
| THICKNESS               | .052  | .052  | .053  | .053  | .053  | .0526  | .040" TO .070"     | 5030 |
|                         | .053  | .052  | .052  | .053  | .052  | .0524  |                    |      |
|                         | .052  | .053  | .053  | .052  | .052  | .0524  |                    |      |
| WEIGHT                  | 1.67  | 1.676 | 1.679 | 1.674 | 1.676 | 1.675  | 1.80 OZ/YD MAXIMUM | 5041 |
|                         | 1.676 | 1.674 | 1.678 | 1.674 | 1.67  | 1.6744 |                    |      |
|                         | 1.674 | 1.676 | 1.671 | 1.676 | 1.674 | 1.6742 |                    |      |
| FACE AND BACK WARP ENDS | 192   | 192   | 192   | 192   | 192   | 192    | 192 ENDS MINIMUM   | 5050 |
|                         | 192   | 192   | 192   | 192   | 192   | 192    |                    |      |
|                         | 192   | 192   | 192   | 192   | 192   | 192    |                    |      |

840 DENIER NYLON, 2 PLY, BRT HIGH TENACITY  
HEAT & LIGHT RESISTANT, NYLON 6.6

|                        |     |     |    |    |    |     |                   |         |
|------------------------|-----|-----|----|----|----|-----|-------------------|---------|
| GROUND YARN DENIER     | 840 | 840 |    |    |    | 840 | 840 DENIER        | 4021 1/ |
|                        | 840 | 840 |    |    |    | 840 |                   |         |
|                        | 840 | 840 |    |    |    | 840 |                   |         |
| GROUND YARN TWIST/INCH | 2.5 | 2.5 |    |    |    | 2.5 | 2 1/2 TPI MINIMUM | 4054 2/ |
|                        | 2.5 | 2.5 |    |    |    | 2.5 |                   |         |
|                        | 2.5 | 2.5 |    |    |    | 2.5 |                   |         |
| GROUND YARN PLY        | 2   | 2   |    |    |    | 2   | 2 PLY             | VISUAL  |
|                        | 2   | 2   |    |    |    | 2   |                   |         |
|                        | 2   | 2   |    |    |    | 2   |                   |         |
| PICKS PER INCH         | 18  | 18  | 18 | 18 | 18 | 18  | 18 PICKS MINIMUM  | 5050    |
|                        | 18  | 18  | 18 | 18 | 18 | 18  |                   |         |
|                        | 18  | 18  | 18 | 18 | 18 | 18  |                   |         |
| FILL YARN DENIER       | 840 | 840 |    |    |    | 840 | 840 DENIER        | 4021 1/ |
|                        | 840 | 840 |    |    |    | 840 |                   |         |
|                        | 840 | 840 |    |    |    | 840 |                   |         |
| FILL YARN TWIST/INCH   | 2.5 | 2.5 |    |    |    | 2.5 | 2 1/2 TPI MINIMUM | 3.3.1.2 |
|                        | 2.5 | 2.5 |    |    |    | 2.5 |                   |         |
|                        | 2.5 | 2.5 |    |    |    | 2.5 |                   |         |

Continued on Next Page





# LAB REPORT

PAGE: .3

Number: 237437-5117

Bally Ribbon Mills  
23 North 7th St. Bally PA 19503  
p 610.845.2211 f 610.845.8013

06/02/16

Qualified Lab - List No. 1935

Customer TULMAR SAFETY SYSTEMS

Purchase Order No. 30196-00

Shipped Via FEDX PRIORITY 1

Specifications MIL-W-4089K TYPE VIIIB CL.1  
Contract No. UV, MOULD, FUNGUS RESISTANT  
DOM: 04/16 LOT: 9C8905

Memo No. 431476  
Shipped Qty 108 YD

BALLY RIBBON MILLS 938102000BKFT  
Pattern No. 9381-2" BLACK FLAME RESIST. TREATED NYL.WEBBING

Lot Qty 1247

\*.....TESTS.....\* \*.....TEST RESULTS.....\* AVERAGE \*....REQUIREMENT....\* METHOD

I certify that the above tests were performed under my supervision in accordance with the specification test requirements and that the reported test results are true, valid and applicable to the samples tested.

JUN 07 2016



*Jerome Richards*

2227-002

3#1

Jerome Richards, Quality Assurance Manager

05/13/08  
Qualified Lab  
List No. 1935  
(610)-845-2211

## B A L L Y R I B B O N M I L L S

23 N. 7th Street  
Bally, PA 19503

PAGE: 1

REPORT # 129125-6051

|                                   |                                                       |  |             |             |
|-----------------------------------|-------------------------------------------------------|--|-------------|-------------|
| Customer                          | TULMAR SAFETY SYSTEMS                                 |  | Shipped Via | UPS COLLECT |
| Purchase Order No.                | 14032-00                                              |  | Memo No.    | 320861      |
| Specifications                    | MIL-W-4088K TYPE XVII CLASS 1A<br>P/N 2262-002        |  | Shipped Qty | 190 YD      |
| Contract No.                      | UV, MOULD, FUNGUS RESISTANT<br>DOM: 05/08 LOT: 993894 |  | Lot Qty     | 212         |
| BALLY RIBBON MILLS<br>Pattern No. | 4028-1" RED #31350 NYLON WEBBING                      |  |             |             |

| *-----TESTS-----*       | *-----TEST RESULTS-----*                                                                                                                                                                              |              |              |              |              | AVERAGE        | *---REQUIREMENT--- | METHOD  |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|--------------|--------------|----------------|--------------------|---------|
|                         | FAR 25.853 (a) APPENDIX F<br>PART 1 SUBSECTION (a) (1) (II),<br>CHARLENGTH: 27/32" 29/32" 27/32" : 8" MAX<br>BURN TIME : 0 6.3S 0 : 159EC MAX<br>FLAMEDRIPPS : 0 0 0 : 5 SEC MAX<br>S/E : Y Y Y : S/E |              |              |              |              |                |                    |         |
| WIDTH                   | 1<br>1                                                                                                                                                                                                | 1<br>1       | 1<br>1       | 1<br>1       | 1<br>1       | 1<br>1         | 1" +/-1/16"        | 5020    |
| THICKNESS               | .066<br>.067                                                                                                                                                                                          | .068<br>.067 | .069<br>.069 | .066<br>.066 | .069<br>.068 | .0676<br>.0674 | .045" TO .070"     | 5030    |
| WEIGHT                  | .977<br>.972                                                                                                                                                                                          | .972<br>.972 | .972<br>.977 | .977<br>.977 | .977<br>.972 | .975<br>.974   | 1.15 OZ/YD MAXIMUM | 5041    |
| FACE AND BACK WARP ENDS | 114<br>114                                                                                                                                                                                            | 114<br>114   | 114<br>114   | 114<br>114   | 114<br>114   | 114<br>114     | 114 ENDS MINIMUM   | 5050    |
|                         | 840 DENIER NYLON, 2 PLY, BRT. HIGH TENACITY<br>HEAT & LIGHT RESISTANT, NYLON 6.6                                                                                                                      |              |              |              |              |                |                    |         |
| GROUND YARN DENIER      | 840<br>840                                                                                                                                                                                            | 840<br>840   |              |              |              | 840<br>840     | 840 DENIER         | 4021 1/ |
| GROUND YARN TWIST/INCH  | 2.5<br>2.5                                                                                                                                                                                            | 2.5<br>2.5   |              |              |              | 2.5<br>2.5     | 2 1/2 TPI MINIMUM  | 4054 2/ |
| GROUND YARN PLY         | 2<br>2                                                                                                                                                                                                | 2<br>2       |              |              |              | 2<br>2         | 2 PLY              | VISUAL  |
| PICKS PER INCH          | 32<br>32                                                                                                                                                                                              | 32<br>33     | 33<br>33     | 33<br>32     | 32<br>32     | 32.4<br>32.4   | 30 PICKS MINIMUM   | 5050    |
|                         | 840 DENIER NYLON, 1 PLY, BRT. HIGH TENACITY<br>HEAT & LIGHT RESISTANT, NYLON 6.6<br>CATCHCORD - 70 DENIER BLACK POLYESTER                                                                             |              |              |              |              |                |                    |         |
| FILL YARN DENIER        | 840<br>840                                                                                                                                                                                            | 840<br>840   |              |              |              | 840<br>840     | 840 DENIER         | 4021 1/ |
| FILL YARN PLY           | 1<br>1                                                                                                                                                                                                | 1<br>1       |              |              |              | 1<br>1         | 1 PLY              | VISUAL  |
| BREAKING STRENGTH       | 3720<br>3760                                                                                                                                                                                          | 3860<br>3760 | 3820<br>3720 | 3800<br>3820 | 3780<br>3780 | 3796<br>3768   | 2500 LBS. MINIMUM  | 4108    |
| WEAVE                   | PASS                                                                                                                                                                                                  |              |              |              |              |                | PASS OR FAIL       | VISUAL  |
| WEAVE                   | PASS                                                                                                                                                                                                  |              |              |              |              |                | PASS OR FAIL       | VISUAL  |
| WEAVE                   | TWO UP, TWO DOWN HERRINGBONE TWILL<br>W/ONE CENTER REVERSAL                                                                                                                                           |              |              |              |              |                | PASS OR FAIL       | VISUAL  |
| COLORFASTNESS/CROCKING  | 4<br>4                                                                                                                                                                                                |              |              |              |              | 4<br>4         | 3.5 MINIMUM RATING | 5651    |

Continued on Next Page

05/13/08  
Qualified Lab  
List No. 1935  
(610)-845-2211

## B A L L Y R I B B O N M I L L S

PAGE: 2

23 N. 7th Street  
Bally, PA 19503

REPORT # 129125-6051

Customer TULMAR SAFETY SYSTEMS  
Purchase Order No. 14032-00 Shipped Via UPS COLLECT  
Specifications MIL-W-4088K TYPE XVII CLASS 1A Memo No. 320861  
Contract No. P/N 2262-002 Shipped Qty 190 YD  
DOM: 05/08 LOT: 993894  
Lot Qty 212  
BALLY RIBBON MILLS  
Pattern No. 4028-1" RED #31350 NYLON WEBBING

| *-----TESTS-----*        |      | *-----TEST RESULTS-----* |      |      |      |      |       | AVERAGE      | *---REQUIREMENT--- | METHOD   |
|--------------------------|------|--------------------------|------|------|------|------|-------|--------------|--------------------|----------|
| COLORFASTNESS/LIGHT      | GOOD |                          |      |      |      |      |       | GOOD         |                    | 5660     |
| COLORFASTNESS/LIGHT      | GOOD |                          |      |      |      |      |       | GOOD         |                    | 5660     |
| COLORFASTNESS/LAUNDERING | FAIR |                          |      |      |      |      |       | FAIR         |                    | 5614 2/  |
| COLORFASTNESS/LAUNDERING | FAIR |                          |      |      |      |      |       | FAIR         |                    | 5614 2/  |
| CURVATURE                |      | .125                     | .093 | .125 | .156 | .125 | .1248 | .25" MAXIMUM |                    | 4.5.1    |
|                          |      | .093                     | .093 | .125 | .125 | .156 | .1184 |              |                    |          |
| PH                       |      | 6.4                      | 6.4  |      |      |      | 6.4   | 5.0 TO 8.5   |                    | 2811     |
|                          |      | 6.4                      | 6.4  |      |      |      | 6.4   |              |                    |          |
| NYLON YARN               | PASS |                          |      |      |      |      |       | PASS OR FAIL |                    | 3.3.1    |
| NYLON YARN               | PASS |                          |      |      |      |      |       | PASS OR FAIL |                    | 3.3.1    |
| NYLON MELTING POINT      |      | 484                      | 482  |      |      |      | 483   |              |                    | 1534     |
|                          |      | 482                      | 484  |      |      |      | 483   |              |                    |          |
| NON BLEACHING            | NONE |                          |      |      |      |      |       | NONE         |                    | 3.4.3 1/ |
| NON BLEACHING            | NONE |                          |      |      |      |      |       | NONE         |                    | 3.4.3 1/ |

I certify that the above tests were performed under my supervision in accordance with the specification test requirements and that the reported test results are true, valid and applicable to the samples tested.

*Jerome Richards*  
Jerome Richards, Quality Control Manager

Qualified Lab  
List No. 1935  
(610)-845-2211

B A L L Y   R I B B O N   M I L L S

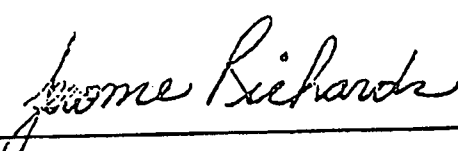
23 N. 7th Street  
Bally, PA 19503

05/13/08

|                                   |                                                     |             |             |
|-----------------------------------|-----------------------------------------------------|-------------|-------------|
| Customer                          | TULMAR SAFETY SYSTEMS                               | Shipment    |             |
| Purchase Order No.                | 14032-00                                            | Shipped Via | UPS COLLECT |
| Specifications                    | MIL-W-4088K TYPE XVII CLASS 1A<br>P/N 2262-002      | Memo No.    | 320861      |
| Contract No.                      | UV, MOULD, FUNGUS RESISTANT<br>LOT#993894 DOM:05/08 | Quantity    | 190 YD      |
| BALLY RIBBON MILLS<br>Pattern No. | 4028-1" RED #31350 NYLON WEBBING                    |             |             |

CERTIFICATE OF CONFORMANCE

I certify that this pattern conforms with the physical, chemical, and visual quality of the Military Specifications listed above.

  
JEROME RICHARDS

QUALITY ASSURANCE MANAGER

⑧  
T2s # 2262-002/01



# CERTIFICATE

Number: 228822-5349

Bally Ribbon Mills  
23 North 7th St. Bally PA 19503  
p 610.845.2211 f 610.845.8013

03/07/16

Qualified Lab - List No. 1935

|                    |                                                                 |              |               |
|--------------------|-----------------------------------------------------------------|--------------|---------------|
| Customer           | TULMAR SAFETY SYSTEMS                                           | Memo No.     | 428469        |
| Purchase Order No. | 29841-00                                                        | Shipment     |               |
| Specifications     | MIL-W-4088K CLASS 1 TYPE XVII<br>COLOR CHIP #37030 P/N TSS2262B | Shipped Via  | FEDEX ECONOMY |
| Contract No.       | LOT #9C5759 DOM:08/15<br>UV, MOULD, FUNGUS RESISTANT            | Quantity     | 700 YD        |
| BALLY RIBBON MILLS | 894101000BK                                                     | Lot Quantity | 1480 YDS      |
| Pattern No.        | 8941-1" BLACK NYLON WEBBING                                     |              |               |

## CERTIFICATE OF CONFORMANCE

I CERTIFY THAT THIS PATTERN CONFORMS WITH THE PHYSICAL, CHEMICAL AND VISUAL QUALITY REQUIREMENTS OF THE MILITARY SPECIFICATIONS LISTED ABOVE AND THE FAR 25.853(A), APPENDIX F, PART 1, SUBSECTION (A)(1)(IV).

NOTE: THIS CERT IS FOR BRM TESTING ONLY AND DOES NOT INDICATE FAA ACCEPTANCE.

Jerome Richards, Quality Assurance Manager

MAR 31 2016

2262-B  
B#19





Bally Ribbon Mills  
23 North 7th St. Bally PA 19503  
p 610.845.2211 f 610.845.8013

03/07/16

# LAB REPORT

Number: 228822-2256

PAGE: 1

Qualified Lab - List No. 1935

Customer TULMAR SAFETY SYSTEMS

Purchase Order No. 29841-00

Specifications MIL-W-4088K CLASS 1 TYPE XVII  
COLOR CHIP #37030 P/N TSS2262B  
Contract No. UV, MOULD, FUNGUS RESISTANT  
DOM: 08/15 LOT: 9C5759

BALLY RIBBON MILLS 894101000BK  
Pattern No. 8941-1" BLACK NYLON WEBBING

Shipped Via FEDEX ECONOMY

Memo No. 428469

Shipped Qty 700 YD

Lot Qty 1480

\*-----TESTS-----\* \*-----TEST RESULTS-----\* AVERAGE \*---REQUIREMENT---\* METHOD

FAR 25.853 (a) APPENDIX F  
PART 1 SUBSECTION (a) (1) (IV),  
BURN RATE 0 0 0 2 1/2" / 1 MIN MAX

|                                                                                 |      |      |      |      |      |        |                    |         |
|---------------------------------------------------------------------------------|------|------|------|------|------|--------|--------------------|---------|
| WIDTH                                                                           | .984 | .968 | .968 | 1    | .984 | .9808  | 1" +/- 1/16"       | 5020    |
|                                                                                 | .968 | .953 | .968 | .968 | .984 | .9682  |                    |         |
|                                                                                 | .968 | 1    | 1    | .984 | .968 | .984   |                    |         |
| THICKNESS                                                                       | .058 | .062 | .065 | .066 | .065 | .0632  | .045" TO .070"     | 5030    |
|                                                                                 | .062 | .059 | .066 | .067 | .062 | .0632  |                    |         |
|                                                                                 | .06  | .06  | .059 | .064 | .061 | .0608  |                    |         |
| WEIGHT                                                                          | .934 | .959 | .954 | .959 | .938 | .9488  | 1.15 OZ/YD MAXIMUM | 5041    |
|                                                                                 | .956 | .96  | .938 | .954 | .934 | .9484  |                    |         |
|                                                                                 | .954 | .958 | .961 | .959 | .954 | .9572  |                    |         |
| FACE AND BACK WARP ENDS                                                         | 114  | 114  | 114  | 114  | 114  | 114    | 114 ENDS MINIMUM   | 5050    |
|                                                                                 | 114  | 114  | 114  | 114  | 114  | 114    |                    |         |
|                                                                                 | 114  | 114  | 114  | 114  | 114  | 114    |                    |         |
| 840 DENIER NYLON, 2 PLY, BRT HIGH TENACITY<br>HEAT & LIGHT RESISTANT, NYLON 6.6 |      |      |      |      |      |        |                    |         |
| GROUND YARN DENIER                                                              | 840  | 840  |      |      |      | 840    | 840 DENIER         | 4021 1/ |
|                                                                                 | 840  | 840  |      |      |      | 840    |                    |         |
|                                                                                 | 840  | 840  |      |      |      | 840    |                    |         |
| GROUND YARN TWIST/INCH                                                          | 2.5  | 2.5  |      |      |      | 2.5    | 2 1/2 TPI MINIMUM  | 4054 2/ |
|                                                                                 | 2.5  | 2.5  |      |      |      | 2.5    |                    |         |
|                                                                                 | 2.5  | 2.5  |      |      |      | 2.5    |                    |         |
| GROUND YARN PLY                                                                 | 2    | 2    |      |      |      | 2      | 2 PLY              | VISUAL  |
|                                                                                 | 2    | 2    |      |      |      | 2      |                    |         |
|                                                                                 | 2    | 2    |      |      |      | 2      |                    |         |
| PICKS PER INCH                                                                  | 16.5 | 16.5 | 17   | 17   | 17.5 | 16.9   | 15 PICKS MINIMUM   | 5050    |
|                                                                                 | 17   | 17   | 17   | 16.5 | 17.5 | 17     |                    |         |
|                                                                                 | 17.5 | 16.5 | 17.5 | 17   | 16.5 | 17     |                    |         |
| 840 DENIER NYLON, 2 PLY, BRT HIGH TENACITY<br>HEAT & LIGHT RESISTANT, NYLON 6.6 |      |      |      |      |      |        |                    |         |
| FILL YARN DENIER                                                                | 840  | 840  |      |      |      | 840    | 840 DENIER         | 4021 1/ |
|                                                                                 | 840  | 840  |      |      |      | 840    |                    |         |
|                                                                                 | 840  | 840  |      |      |      | 840    |                    |         |
| FILL YARN PLY                                                                   | 2    | 2    |      |      |      | 2      | 2 PLY              | VISUAL  |
|                                                                                 | 2    | 2    |      |      |      | 2      |                    |         |
|                                                                                 | 2    | 2    |      |      |      | 2      |                    |         |
| BREAKING STRENGTH                                                               | 3184 | 3640 | 3070 | 3557 | 3557 | 3401.6 | 2500 LBS MINIMUM   | 4108    |
|                                                                                 | 3601 | 3553 | 3404 | 3195 | 3219 | 3394.4 |                    |         |
|                                                                                 | 3469 | 3674 | 3454 | 3273 | 3551 | 3484.2 |                    |         |

Continued on Next Page





Bally Ribbon Mills  
23 North 7th St. Bally PA 19503  
p 610.845.2211 f 610.845.8013

03/07/16

# LAB REPORT

Number: 228822-2256

PAGE: 2

Qualified Lab - List No. 1935

Customer TULMAR SAFETY SYSTEMS  
Purchase Order No. 29841-00  
Specifications MIL-W-4088K CLASS 1 TYPE XVII  
COLOR CHIP #37030 P/N TSS2262B  
Contract No. UV, MOULD, FUNGUS RESISTANT  
DOM: 08/15 LOT: 9C5759  
BALLY RIBBON MILLS 894101000BK  
Pattern No. 8941-1" BLACK NYLON WEBBING

Shipped Via FEDEX ECONOMY  
Memo No. 428469  
Shipped Qty 700 YD  
Lot Qty 1480

| *-----TESTS-----*         |                                    |      |      |      | *-----TEST RESULTS-----* |       |              |  |  | AVERAGE      | *---REQUIREMENT--- | METHOD  |
|---------------------------|------------------------------------|------|------|------|--------------------------|-------|--------------|--|--|--------------|--------------------|---------|
| WEAVE                     | PASS                               |      |      |      |                          |       |              |  |  | PASS OR FAIL |                    | VISUAL  |
| WEAVE                     | PASS                               |      |      |      |                          |       |              |  |  | PASS OR FAIL |                    | VISUAL  |
| WEAVE                     | PASS                               |      |      |      |                          |       |              |  |  | PASS OR FAIL |                    | VISUAL  |
| WEAVE                     | TWO UP, TWO DOWN HERRINGBONE TWILL |      |      |      |                          |       |              |  |  | PASS OR FAIL |                    | VISUAL  |
|                           | W/ONE CENTER REVERSAL              |      |      |      |                          |       |              |  |  |              |                    |         |
| COLORFASTNESS/WET CROCK   | 5                                  |      |      |      |                          |       |              |  |  | 5            | 3.5 MINIMUM RATING | 5651    |
|                           | 5                                  |      |      |      |                          |       |              |  |  | 5            |                    |         |
|                           | 5                                  |      |      |      |                          |       |              |  |  | 5            |                    |         |
| COLORFASTNESS/DRY CROCK   | 5                                  |      |      |      |                          |       |              |  |  | 5            | 3.5 MINIMUM RATING | 5651    |
|                           | 5                                  |      |      |      |                          |       |              |  |  | 5            |                    |         |
|                           | 5                                  |      |      |      |                          |       |              |  |  | 5            |                    |         |
| COLORFASTNESS/LIGHT(FADE) | GOOD                               |      |      |      |                          |       |              |  |  | GOOD         |                    | 5660    |
| COLORFASTNESS/LIGHT(FADE) | GOOD                               |      |      |      |                          |       |              |  |  | GOOD         |                    | 5660    |
| COLORFASTNESS/LIGHT(FADE) | GOOD                               |      |      |      |                          |       |              |  |  | GOOD         |                    | 5660    |
| COLORFASTNESS/LIGHT(FADE) | XENON                              |      |      |      |                          |       |              |  |  | GOOD         |                    | 5660    |
| COLORFASTNESS/LAUNDERING  | FAIR                               |      |      |      |                          |       |              |  |  | FAIR         |                    | 5614 2/ |
| COLORFASTNESS/LAUNDERING  | FAIR                               |      |      |      |                          |       |              |  |  | FAIR         |                    | 5614 2/ |
| COLORFASTNESS/LAUNDERING  | FAIR                               |      |      |      |                          |       |              |  |  | FAIR         |                    | 5614 2/ |
| CURVATURE                 | .156                               | .125 | .125 | .156 | .218                     | .156  | .25" MAXIMUM |  |  | .156         |                    | 4.5.1   |
|                           | .125                               | .156 | .187 | .25  | .156                     | .1748 |              |  |  | .131         |                    |         |
|                           | .125                               | .156 | .093 | .125 | .156                     |       |              |  |  |              |                    |         |
| PH                        | 6.01                               | 6.01 |      |      |                          | 6.01  | 5.0 TO 8.5   |  |  | 5.86         |                    | 2811    |
|                           | 5.86                               | 5.86 |      |      |                          | 5.86  |              |  |  | 5.89         |                    |         |
|                           | 5.89                               | 5.89 |      |      |                          |       |              |  |  |              |                    |         |
| NYLON YARN                | PASS                               |      |      |      |                          |       |              |  |  | PASS OR FAIL |                    | 3.3.1   |
| NYLON YARN                | PASS                               |      |      |      |                          |       |              |  |  | PASS OR FAIL |                    | 3.3.1   |
| NYLON YARN                | PASS                               |      |      |      |                          |       |              |  |  | PASS OR FAIL |                    | 3.3.1   |
| NON BLEACHING             | NONE                               |      |      |      |                          |       |              |  |  | NONE         |                    | 3.3.1   |
| NON BLEACHING             | NONE                               |      |      |      |                          |       |              |  |  | NONE         |                    | 3.3.1   |
| NON BLEACHING             | NONE                               |      |      |      |                          |       |              |  |  | NONE         |                    | 3.3.1   |
| NYLON MELTING POINT       | 484                                | 482  |      |      |                          | 483   |              |  |  | 483          |                    | 1534    |
|                           | 482                                | 484  |      |      |                          | 483   |              |  |  | 483          |                    |         |
|                           | 484                                | 482  |      |      |                          |       |              |  |  |              |                    |         |

I certify that the above tests were performed under my supervision in accordance with the specification test requirements and that the reported test results are true, valid and applicable to the samples tested.

MAR 31 2016

2262-B  
B#19

T.S.S.  
27

Jerome Richards  
Jerome Richards, Quality Assurance Manager



# cansew inc.

formerly / anciennement  
Canadian Sewing Supply Ltd. / Ltée - established / établie 1924

Manufacturers of sewing threads. / Wholesalers of elastics, Velcro, tapes, trimmings.  
Fabricants de fils à coudre. / Grossistes d'élastiques, Velcro, galons, garnitures.

10 May 2010

Tulmar Safety Systems  
1123 Cameron Street  
Hawksbury, Ontario  
K6A 2B8

Attn: Sandra Nadeau

## CERTIFICATE OF COMPLIANCE

This is to certify that the item mentioned below, shipped to Tulmar Safety Systems by CANSEW INC. on 10 May 2010, has been produced in accordance with the conditions set forth in Purchase Order no. 17817-00 of the same day:

-Bonded Nylon CB138 tex 135 - 10,40 lb. colour black, lot # 188476

The product meets the requirements of specification V-T-295, Type 2, Class A, Size FF.

Yours truly,

Hershie Schachter  
CANSEW INC.

MONTREAL - Head Office/Siège social  
111 Chabanel W / O H2N 1C9  
Administration (514) 382-2807  
Commandes/Orders (514) 382-2801  
1-800-361-7722  
FAX: (514) 385-5530

TORONTO  
28 Apex Rd. M6A 2V2  
(416) 782-1122  
1-800-367-8584  
FAX: (416) 782-8358

WINNIPEG  
1674 Church Ave R2X 2W9  
(204) 942-4264  
1-800-665-0701  
FAX: (204) 947-9280

CALGARY  
3932 - 29<sup>th</sup> St. N.E. T1Y 6B6  
(403) 291-4494  
1-800-667-4197  
FAX: (403) 291-5139

VANCOUVER  
1615 Venables St. V5L 2H1  
(604) 682-4341  
1-800-580-0737  
FAX: (604) 682-4196

info@cansew.ca

www.cansew.ca

TS 2547/05

# ACW CANADA

1192 Kingston Road Pickering, Ontario, Canada L1V 1B4  
Toll Free: 1-800-545-9751 Local: 905-839-2247 Fax: 905-839-2336  
www.acwcanada.ca


MEAGAN BOCKING  
TULMAR SAFETY SYSTEMS  
1123 CAMERON STREET  
HAWKESBURY, ONTARIO  
K6A 2B8

AUGUST 13. 2014

TO WHOM IT MAY CONCERN:

THIS CERTIFICATION COVERS SHIPMENT ON OUR INVOICE # 20285  
DATED 08/13/2014 AGAINST YOUR ORDER # PO# 27600-00  
MATERIAL SHIPPED AGAINST THIS INVOICE COMPLY WITH APPLICABLE  
SPECIFICATIONS LISTED BELOW:

S/N 91596 PATT# CSR-1" BLACK, ACETAL SIDE RELEASE  
BUCKLE. MATERIAL DOES NOT SUPPORT FUNGUS GROWTH.  
COMPLIES WITH FAR SECTION 25.853 (A) APPENDIX F,  
PART (A) (1) (IV). MIN.BREAK STRENGHT 230 LBS.  
RETAINING CHARACTERISTICS OVER THE TEMPERATURE  
RANGE -60 TO +160 DEGREES F.  
TSS 4152

  
-----  
AUTHORIZED SIGNATURE AND TITLE

MIKE MORGAN  
CANADIAN SALES MANAGER

TSS 4152 /12 (L)



Avery Juarez  
Av. Adolfo Lopez Mateos 2455 | Col. Partido Iglesias | Cd. Juarez, Chih

## CERTIFICATE OF CONFORMANCE

I certify that the article(s) shipped:

- Conform(s) to all applicable drawing dimensions and specifications.
- Meets all the requirements of your purchase order.

This includes all labels produced for

Customer: TULMAR

| <u>Item No.</u> | <u>Item description</u> | <u>Order Number</u> | <u>Quantity</u> |
|-----------------|-------------------------|---------------------|-----------------|
| 10D011620       | See below               | PO: 29709-00        | 15 rolls        |

Ink, Thermal Transfer Ribbon black, 1<sup>1/2</sup> wide, HS1111

Remarks: \_\_\_\_\_

Guillermo Ramirez

03/17/2016

\_\_\_\_\_  
Certifying Manager

\_\_\_\_\_  
DATE

MAR 18 2016



22019-500  
B#39

Please insert your company letter head  
& Complete address

## Certificate of Compliance

DATE: 2/21/08  
OUR PROD. NO.: 208008307  
CUSTOMER P/O NO.: 13776-01  
CUSTOMER: Tulmar Safety Systems Inc.  
PRODUCT: Tinted Tape 4800WT 3/4"  
QTY. SHIPPED: 5010 yds.  
LOT NO.: N/A  
MFG DATE: 2/19/08  
ROLL NO.: N/A  
SHELF LIFE: 1 year  
We certify that the product,

was manufactured, inspected and Conforms to specifications  
applicable to the product.

Signature: *Chris McHester*

Title: *Supervisor*



160 Milner Avenue, Toronto, ON M1S 3R3, CANADA  
Tel: 416-412-7144 / 1-888-412-7144 Fax: 416-412-7145  
Email: [sales@ctscargotiedown.com](mailto:sales@ctscargotiedown.com)  
Website: [www.ctscargotiedown.com](http://www.ctscargotiedown.com)

| Customer Name              | Purchase Order Number | Packing slip No. | Purchase Date (MM-DD-YYYY) |
|----------------------------|-----------------------|------------------|----------------------------|
| TULMAR SAFETY SYSTEMS INC. | 30132-00              | 186030           | 05-18-2016                 |

## Certificate of Compliance – Hardware/Webbing

| Qty. | Item No. | Description                       | WORKING LOAD<br>LIMIT (LBS) | BREAKING<br>STRENGTH (LBS) | Country of Origin |
|------|----------|-----------------------------------|-----------------------------|----------------------------|-------------------|
| 330  | P6002-S0 | 2" POLYESTER WEBBING, COLOUR: RED |                             | 6,000                      | CN                |
| 330  | P2502-25 | 1" POLYESTER WEBBING, COLOUR: RED |                             | 2,500                      | CN                |

I hereby certify that the goods listed hereon have been inspected and/or tested, as applicable, and conform to all specifications and requirements detailed in the contract or purchase order and relevant quality clauses. This report is applicable only to the sample or samples tested. Rework of this product may alter these results.

Signed by: CTC

### Design Factor

The design factor for tie downs shall be a minimum of 3.

### Proof Test

Has been test to a minimum of one and one half (1.5) times  
the working load limit (WLL).

MAY 24 2016



22038-001

B#1



May 11, 2016

**TULMAR SAFETY SYSTEMS**  
1123 CAMERON STREET  
HAWKSBURY, ONTARIO  
K6A 2B8

**CERTIFICATE OF COMPLIANCE**

This is to certify that the item mentioned below, shipped to Tulmar Safety Systems by Cansew Inc. on May 10, 2016, has been produced in accordance with the requirements of Purchase Order no. 30118-00 of the same date:

- NB CBB92 LB; Cansew Nylon – Qty 22.50 lbs, Colour: Black  
LOT #: F78828

Description  
Thread, Nylon, Twisted, Black, A-A-59826, TY2, CLA, Size F, CBB92, (Supercedes V-T-295)

|                                            |                                                                                                                                           |                                                                                                             |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Hazardous Materials Acknowledgement</b> | The items described below may contain, and their processing may have include, the following substances:                                   | Hexavalent Chromium: Cadmium: Beryllium; Nickel; Mercury; Lead; Asbesotos; Radioactive elements<br>YES NO ● |
| <b>Country of Origin of Goods: USA</b>     |                                                                                                                                           |                                                                                                             |
| <b>Limited Shelf-Life</b>                  | <u>Definition:</u> If material is consumed or transformed into final product before end of shlf-life there is no effect on final product. | These items have limited Shelf-Life<br>YES NO ●                                                             |
| <b>Expiry date</b>                         | <u>Definition:</u> Date after which performance will no longer be as intended – expiration is transferred to the final product.           | These items have expiry date<br>YES NO ●                                                                    |

Yours truly,

**Richard Doré**  
Sales Manager

|                                                                                                                                                                                                                              |                                                                                                                                                 |                                                                                                                                                       |                                                                                                                                                        |                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MONTREAL</b><br>111 Chabanel W. H2N 1C9<br>Tel. (514) 382-2801<br>1-800-361-7722<br>Fax: (514) 385-5530<br>E-mail: <a href="mailto:info@cansew.ca">info@cansew.ca</a><br><a href="http://www.cansew.ca">www.cansew.ca</a> | <b>TORONTO</b><br>28 Apex Rd. M6A 2V2<br>(416)782-1122<br>1-800-387-8584<br>(416)782-8358<br><a href="mailto:info@cansew.ca">info@cansew.ca</a> | <b>WINNIPEG</b><br>1674 Church Ave. R2X 2W9<br>(204)942-4264<br>1-800-665-0701<br>(204)947-9280<br><a href="mailto:info@cansew.ca">info@cansew.ca</a> | <b>CALGARY</b><br>3932-29th St. N.E. T1Y 6B6<br>(403)291-4494<br>1-800-667-4197<br>(403)291-5139<br><a href="mailto:info@cansew.ca">info@cansew.ca</a> | <b>VANCOUVER</b><br>1217 East Georgia St. V6A 2A9<br>(604)682-4341<br>1-800-580-0737<br>(604)682-4196<br><a href="mailto:info@cansew.ca">info@cansew.ca</a> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|

TSS 2530 B/55



# cansew inc.

formerly / anciennement  
Canadian Sewing Supply Ltd. / Ltée - established / établie 1924

Manufacturers of sewing threads. / Wholesalers of elastics, Velcro, tapes, trimmings.  
Fabricants de fils à coudre. / Grossistes d'élastiques, Velcro, galons, garnitures.

10 May 2010

Tulmar Safety Systems  
1123 Cameron Street  
Hawthorn, Ontario  
K6A 2B8

Att. Sandra Nadeau

## CERTIFICATE OF COMPLIANCE

This is to certify that the item mentioned below, shipped to Tulmar Safety Systems by CANSEW INC. on 10 May 2010, has been produced in accordance with the conditions set forth in Purchase Order no. 17817-00 of the same day:

-Bonded Nylon CB138 tex 135 - 10.40 lb. colour black, lot # 188476

The product meets the requirements of specification V-T-295, Type 2, Class A, Size FF.

Yours truly,

Hershie Schachter  
CANSEW INC.

MONTREAL - Head Office/Siège social  
111 Chabanel W / O H2N 1C9  
Administration (514) 382-2807  
Commandes/Orders (514) 382-2801  
1-800-361-7722  
FAX: (514) 385-5530

TORONTO  
28 Apex Rd. M6A 2V2  
(416) 782-1122  
1-800-367-8584  
FAX: (416) 782-8358

WINNIPEG  
1674 Church Ave. R2X 2W9  
(204) 942-4264  
1-800-665-0701  
FAX: (204) 947-9280

CALGARY  
3932 - 29th St. N.E. T1Y 6B6  
(403) 291-4494  
1-800-667-4197  
FAX: (403) 291-5139

VANCOUVER  
1615 Venables St. V5L 2H1  
(604) 682-4341  
1-800-580-0737  
FAX: (604) 682-4196

info@cansew.ca

www.cansew.ca

TS 2547/05